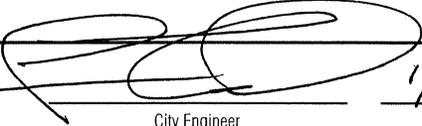


COMBINED STOP SIGN & STREET SIGN

SCALE: NOT TO SCALE

NOTES:

1. PLATES TO BE 0.080 GAUGE ALUMINUM, WIDTH VARIES IN 6" INCREMENTS FROM A MINIMUM OF 24" TO A MAXIMUM OF 36" x 6" IN HEIGHT. CORNER RADIUS IS 0.5", WITHOUT HOLES.
2. SIGN IS SINGLE PLATE, DOUBLE FACE, WITH 3M WHITE 3290 ENGINEER GRADE REFLECTIVE SHEETING OVERLAYED BY 3M 1179 TRANSPARENT FILM FOR OPAQUE BROWN BACKGROUND. LETTERS ARE 3M 3290 WHITE REFLECTIVE ENGINEER GRADE SHEETING APPLIED OVER THE 1179 FILM.
3. LETTER STYLE IS GARAMOND BOLD ITALIC CONDENSED. 4" ALL UPPERCASE FOR STREET NAME; 2" ALL UPPERCASE FOR SUFFIX & BLOCK NUMBER. SUFFIX IS CENTERED OVER "ARROW" AND BLOCK NUMBER WITH 0.75" SPACE BETWEEN LINES.
4. STOP SIGN SHALL BE INSTALLED WITH TWO MOUNTING BRACKETS USING U-BOLTS AND THEFT-PROOF BOLTS.

Approved:  1/4/10
 City Engineer Date



REVISION	
Description	Date

ENGINEERING DIVISION	
COMBINED STOP SIGN & STREET SIGN	SU-16