



END VIEW

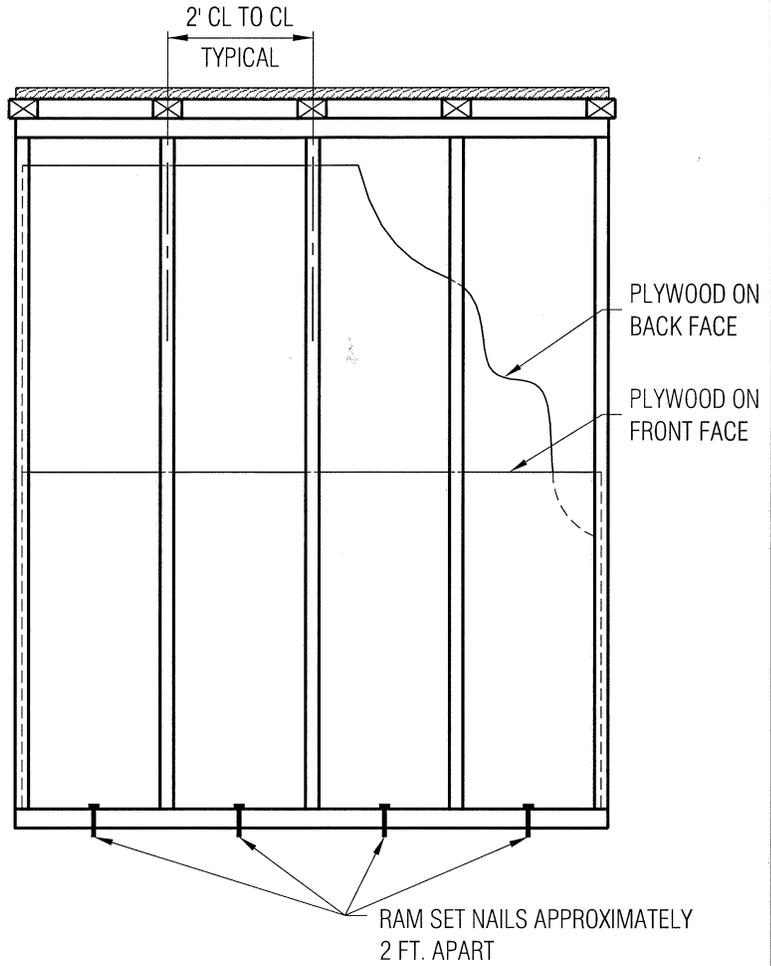


FRONT VIEW

NOTES:

1. PEDESTRIAN SAFETY TUNNEL TO BE EXTENDED A MINIMUM OF 8 FT. BEYOND SCAFFOLDING.
2. ALL HOLES RESULTING FROM RAM SET NAILS IN EXISTING SIDEWALK MUST BE FILLED TO THE SATISFACTION OF THE CITY ENGINEER.
3. PEDESTRIAN TUNNEL TO BE MADE FROM THE FOLLOWING MATERIAL:
 - a. 2x4 DOUGLAS FIR #2 GRADE OR BETTER.
 - b. 4' x 8' x 1/2" CDX PLYWOOD, EXTERIOR GRADE FOR SIDES AND 3/4" FOR TOP.
4. CONSTRUCTION OF TUNNEL TO MEET OSHA & ALL OTHER GOVERNING CODES.

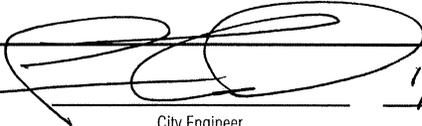Approved:  1/4/10
 City Engineer Date



REVISION	
Description	Date

ENGINEERING DIVISION	
TEMPORARY PEDESTRIAN SAFETY TUNNEL	SU-18