



FRAME AND COVER - EMPIRE
 FOUNDARY CO. NO. MN-78,
 PHOENIX IRON WORKS NO
 P-2001, OR APPROVED EQUAL
 OVER MONUMENT. FRAME
 AND COVER TO BE SET IN
 CONCRETE AFTER PAVING.

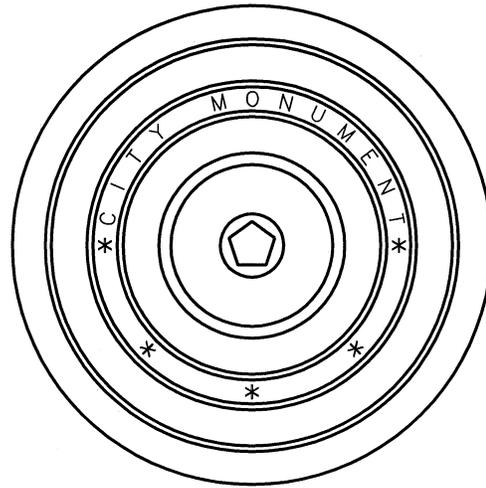

SURVEYOR'S NOTE:
 EXACT POINT TO BE DETERMINED BY
 SURVEY AND CLEARLY PUNCHED IN TOP
 BRASS MARKER TOGETHER WITH
 ENGINEER'S R.C.E. OR SURVEYOR'S R.L.S.
 NUMBER IN 1/8" HIGH NUMERALS

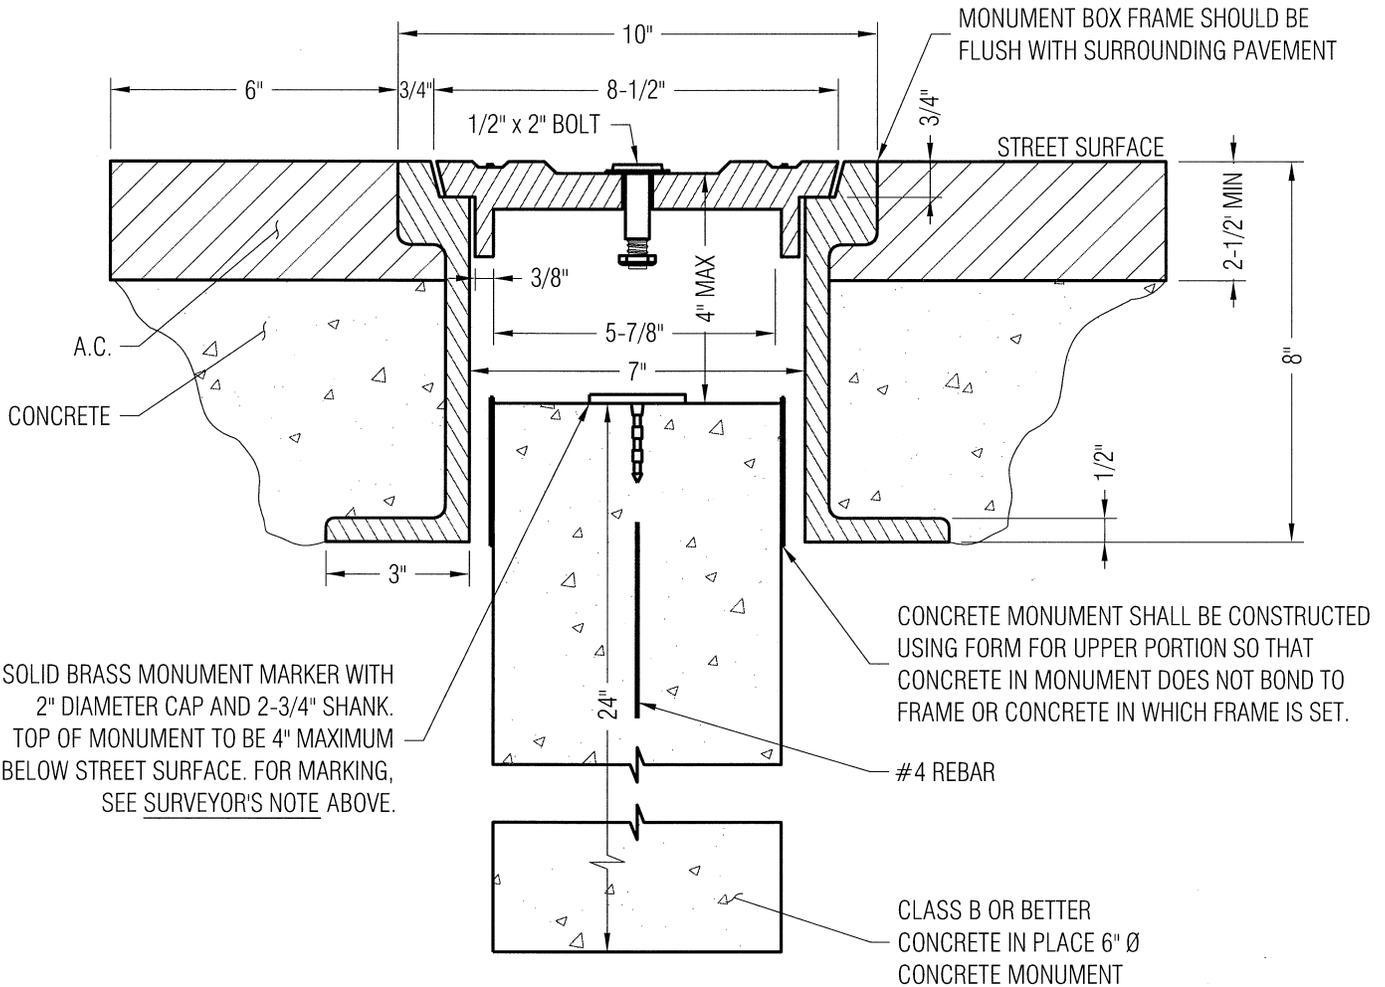


SOLID BRASS MONUMENT MARKER WITH
 2" DIAMETER CAP AND 2-3/4" SHANK.
 TOP OF MONUMENT TO BE 4" MAXIMUM
 BELOW STREET SURFACE. FOR MARKING,
 SEE SURVEYOR'S NOTE ABOVE.


CONCRETE MONUMENT SHALL BE CONSTRUCTED
 USING FORM FOR UPPER PORTION SO THAT
 CONCRETE IN MONUMENT DOES NOT BOND TO
 FRAME OR CONCRETE IN WHICH FRAME IS SET.

#4 REBAR

CLASS B OR BETTER
 CONCRETE IN PLACE 6" Ø
 CONCRETE MONUMENT

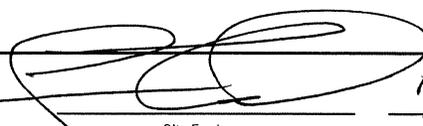Approved:  Date: 1/4/10

City Engineer Date



REVISION	
Description	Date

ENGINEERING DIVISION

SURVEY MONUMENT

SU-14